
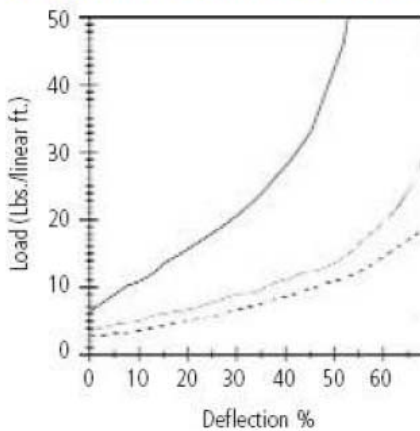


HUAMING is the professional manufacturer for EMC fittings, our products lines include RF shielding room, EMC chamber, RF shielding cabinet, RF shielding door, EMC/EMI filter system, beryllium copper finger, RF shielding gasket, wavetube, honeycomb vent, pyramid absorb material, ferrite tile and others.
 We are willing to be your supplier and hope to work with you in future.

BELOW ARE MAIN PROPERTIES FOR


6101- 0105- 40 (BECU WIRE MESH)

- ◇ SHIELDING EFFECTIVENESS OVER 90dB at 100M to 1GHz PER MIL-STD-285
- ◇ COMPRESS FORCE 2.5KG WITH 30% DEFLECTION PER METER PER APM 330
- ◇ TYPICAL SURFACE RESISTANCE 0.1 Ohms PER WI-4232.5
- ◇ OVER 500,000 CYCLES RECOVERY COMPRESS/ ABRASION RESISTANCE NOT BREAK PER ASTM 3380
- ◇ COMPRESSION SET LOWER 1% PER ASTM D3574

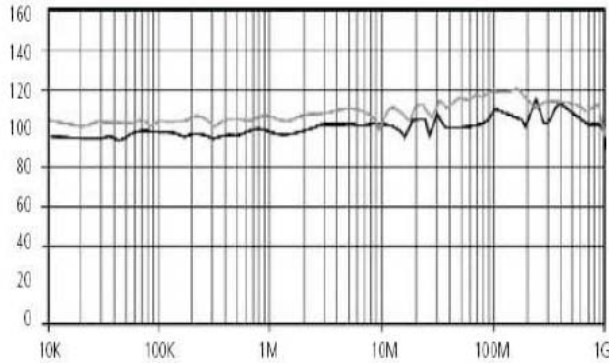

- ◇ SERVICE TEMPERATURE: LONG TERM -40 TO 150 °C, SHORT TERM -60 TO 250 °C PER ASTM D 746
- ◇ CONTINUE LONG TERM SHIELDING EFFICIENCY THAN OTHER MATERIAL
- ◇ WIDE COMPRESS DEFLECTION RANGE FROM 10 TO 90% TO FIT THE GAP
- ◇ MATERIAL: TIN PLATED BERYLLIUM COPPER, THIN WIRE
- ◇ SUGGESTED GROOVE, W: 3.6 MM; H: 4.6MM

DRAWING:

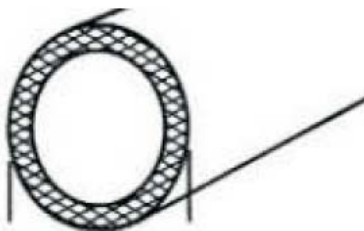

DIA=4.8+0.8/-0MM

