

HM-SF-FireAlarm4 规格书

◆ 技术参数 Specification

典型插入损耗 Typical insertion loss

额定电压 Rated voltage 250VDC

额定电流 Rated current 1A


气候类别 Climatic category 25/085/21

绝缘电阻 Insulation resistance

线一地 Line to Ground 100M Ω /100VDC

频率 Frequency Band	150KHz ~ 10GHz
衰减 Attenuation	100dB

◆ 外形尺寸 Dimension

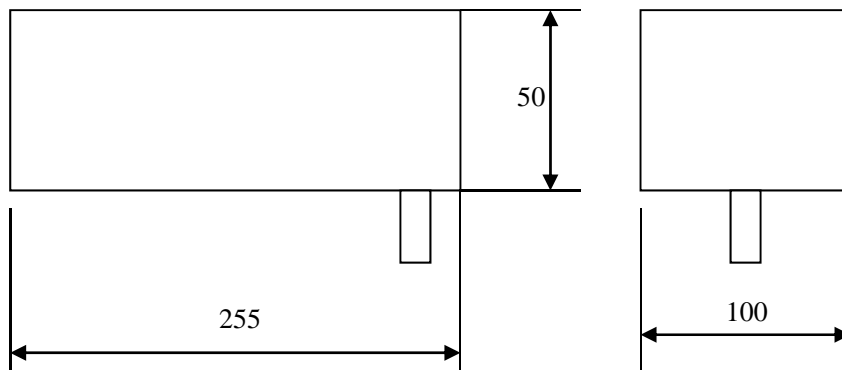

◆ 电性能 Electrical characteristics

用于电磁屏蔽房消防设备信号滤波

Use for fire alarm system in RF shielding room, EMC chamber for signal line purification.