

HM-PF-4X63A-Y 规格书 (交流电源滤波器)

◆ 技术参数 Specification

典型插入损耗 Typical insertion loss

额定电压 Rated voltage 440/250VAC

工作频率 Operating frequency 50/60Hz

额定电流 Rated current 63A

气候类别 Climatic category 25/085/21

频率	10MHz-18GHz
屏蔽效能 (dB)	≥100dB


漏电流 Leakage current ≤20mA@440V/50Hz **Three Phase under balance condition

试验电压 Test voltage (2s/1Min)

线-线 Line-to-line: 1000VDC

线-壳 Line-to-case: 1000VDC

◆ 外形尺寸 Dimension

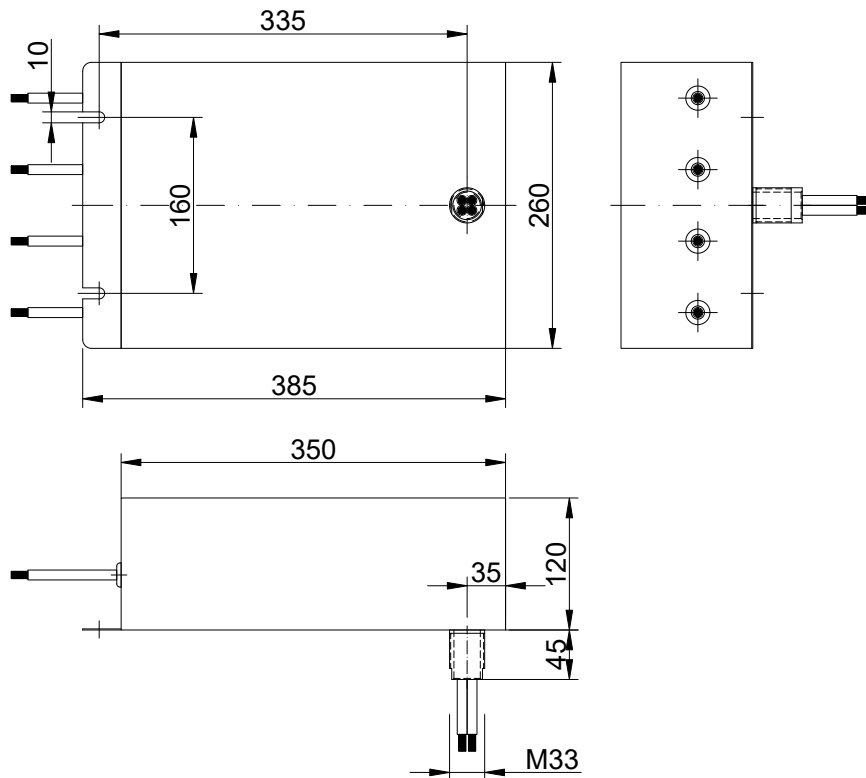

◆ 特点与应用 Features & Applications

工作频带宽，插入损耗高: Wide operating band, high insert loss

干扰抑制能力强: Strong ability for restrain interference

低压降，中等漏电流: Low voltage drop , low leakage current

用于电磁屏蔽房、屏蔽柜、电子方舱、信息安全保密房、医院 CT、核磁共振房、可控硅变流设备、电源净化设备的电源端的滤波 Use for filter in electro-magnetic shielding room、shielding cabinet、electronic、square cabin、information security room 、CT equipment of hospital、nuclear-magnetic、resonance room、SCR current converting equipment、power terminal of the equipments for power purification.